


## Fig. 2 MINIMUM AND MAXIMUM SERVICE TEMPERATURE IN AIR & COEFFICIENT OF LINEAR THERMAL EXPANSION

(average value between 23°C and 100°C)



**TECH NOTES:** When it comes to outdoor applications, ERTACETAL is not recommended because of its poor UV-resistance.

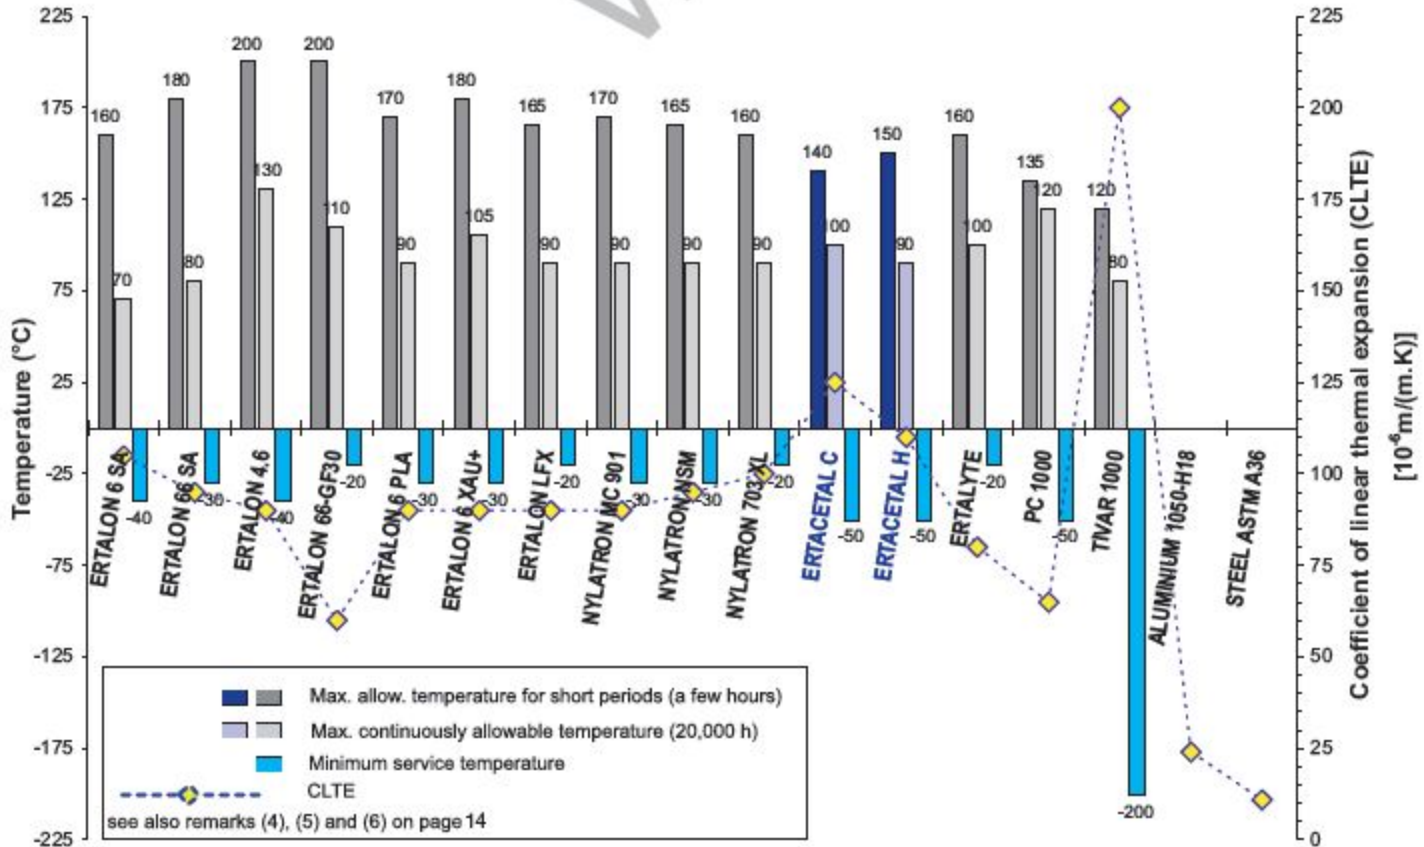

Alpert Engineering Ltd  
 Dublin Industrial Estate,  
 Glasnevin, Dublin11, Ireland  
[www.alpert.com](http://www.alpert.com) [info@alpert.ie](mailto:info@alpert.ie)  
 Phone +353 1 8306277

FDB - 12/9/2006