


Accessories

Emission proof drum adapters

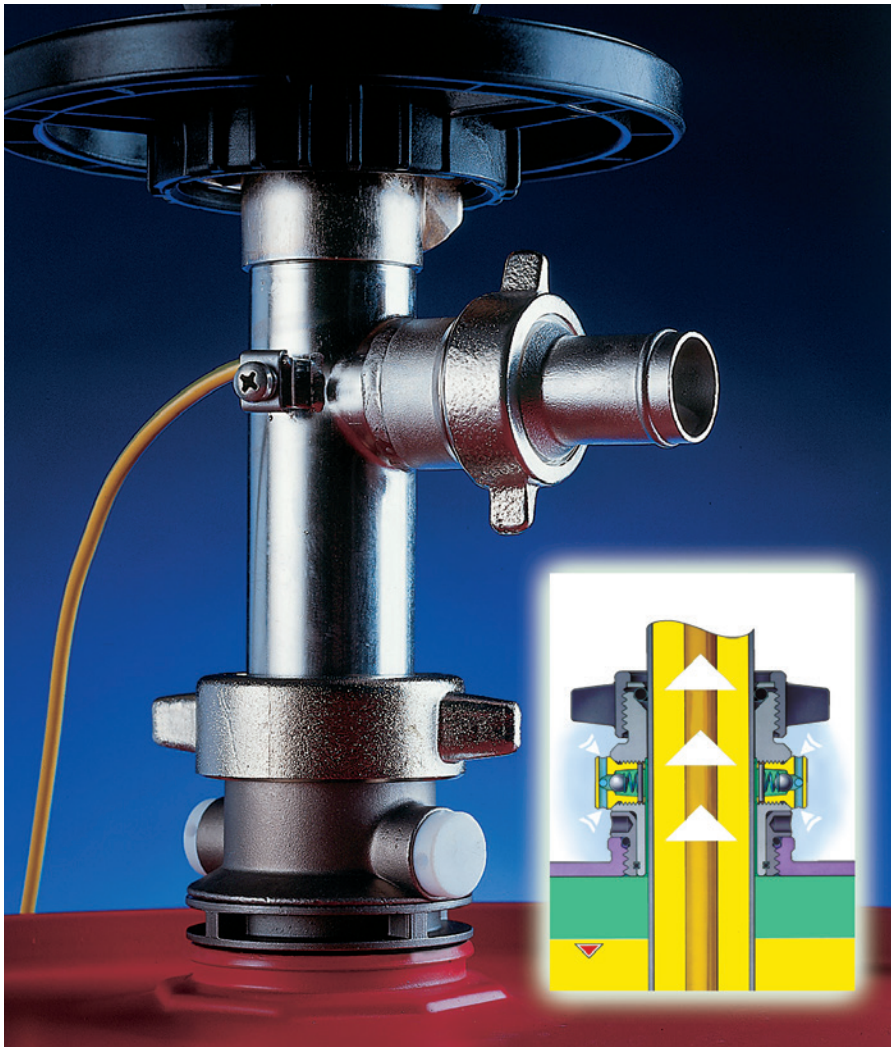

To permit reliable application, emission protection for „on site“ pumping operations must be made as convenient as possible under practical conditions. The Lutz EMIGA system achieves more for the user while involving less work:

- ✓ All that is needed is a single drum adapter with two integrated valves.
- ✓ Due to „active seal“, emission protection is guaranteed even in the event of wear and tear, damage or pump tube diameter tolerances.
- ✓ The lower part of the adapter can be adapted to varying thread and diameter sizes in container openings.
- ✓ Simple installation using a plug-in-connection for individual adaption.
- ✓ Stability ensured by integrated spring loaded mechanism.
- ✓ Suitable container cup for container emptying available.
- ✓ Larger dimensioned air valves cater for pressure equalisation by the fast emptying of containers.

Product detail



Specification

Order-No.

9 Emission proof drum adapter

To prevent emission of dangerous gases when using a drum pump, so protecting the operator, the environment and the drive motor from hazardous, aggressive gases and vapours. Two venting valves ensure pressure compensation between inside of the drum and surrounding atmosphere.

Connection for gas displacement pipe: G 3/8; Screw-in thread: G 2 outer thread

Seals: Viton® or EPDM.

Other threads and seal materials on request.

Material:	Pump tube diameter:
PP	41 mm
PVDF	41 mm
Brass	41 mm
Stainless steel	41 mm

0204-250
0204-465
0204-252 ●
0204-253 ●

Following special threads are available without additional costs

PP	S 71 x 6 OT, S 70 X 6 OT, S 69 x 5.5 OT, S 57 x 4 OT
Stainless steel	S 57 x 4 OT, S 60 x 5 IT, M 64 x 4 OT

Air valve for emptying of containers (additional costs see price list)

0204-364

Container cap

DN 150
DN 225

0373-060
0373-061

● Suitable for transferring combustible and easy inflammable liquids (e.g. ethanol, petrol) or in explosive hazard area.